



e.VAV

The new revolution of VAV system



Indoor Air Quality management

Airflows management

Integrated sensors

(CO₂, HR, T°)

VARIABLE AIR VOLUME CIRCULAR DAMPER

e-VAV self-sufficient & connected

The **e-VAV** is a variable air volume damper which enables:

- to manage the airflow of fresh air in offices, commercial buildings and classrooms.
- to regulate the airflow and measure the indoor air quality with its integrated sensors (humidity, temperature and CO₂).

The airflow can also be regulated by an external 0-10 V signal or a dry contact from a remote sensor (presence or CO₂ sensor).

e-VAV is energy self-sufficient and doesn't require any power wiring. It generates its own electricity thanks to its turbine operating by the air flow and its energy harvesting system. This energy is used to supply electricity to the damper and measure indoor air quality.



VERSIONS

- **e-VAV**, variable air volume damper, energy self-sufficient
- **e-VAV QAI**, variable air volume damper with air quality sensor (CO₂), energy self-sufficient
- **e-SENSE**, air quality sensor (CO₂, HR, T°), energy self-sufficient
- **Pack e-VAV QAI** : made of one **e-VAV QAI** with CO₂ sensor for extract, one **e-VAV** for supply, and one specific master/slave wire

CONSTRUCTION

	e-VAV			
	Ø125 mm	Ø160 mm	Ø200 mm	Ø250 mm
Casing	PC ABS, certified V0 (M1) MO casing in option			
Iris damper	PC-ABS, certified M1			
Airproofing membrane	Seal			
Connection	Male connection with EPDM seal			


TECHNICAL SPECIFICATIONS

	e-VAV
Casing airtightness	C Class - ATC 1
Upstream/downstream airtightness	Not classified
Operating temperature	+0°C to +45°C
Operating relative humidity	0...80 % RH (non-condensing)
Wire control (room sensors)	0..10 V signal or ON/OFF switch
Communication	LoRaWan

VARIABLE AIR VOLUME CIRCULAR DAMPER

e-VAV self-sufficient & connected

DIMENSIONS

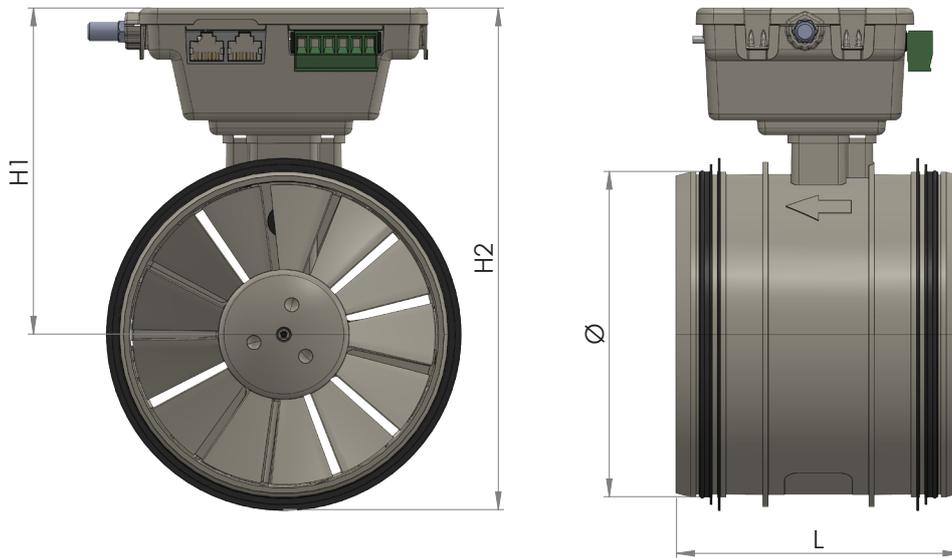

	Ø125 mm	Ø160 mm	Ø200 mm	Ø250 mm
Length in mm	105	105	200	200
Height H1 in mm	121	139	159	184
Height H2 in mm	187	222	264	314
Weight in kg	0.37	0.45	0.9	1.2

AIR MANAGEMENT SPECIFICATION

	e-VAV			
	Ø125 mm	Ø160 mm	Ø200 mm	Ø250 mm
Airflow range min	30 m ³ /h	40 m ³ /h	120 m ³ /h	180 m ³ /h
Airflow range max	220 m ³ /h	400 m ³ /h	600 m ³ /h	1100 m ³ /h
Pressure range min - max	10 Pa - 250 Pa			

The advised airflow range is from 0.5 m/s to 5 m/s

VARIABLE AIR VOLUME CIRCULAR DAMPER

e-VAV self-sufficient & connected

ACOUSTIC PERFORMANCES WITH A 50 Pa PRESSURE LOSS

	Air velocity m/s	Airflow m ³ /h	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Global Lw (dBA)
			Air-regenerated, sound power level Lw								
Ø125 mm	1	44	55	44	40	35	24	17	17	18	35
	3	133	56	51	53	48	41	32	25	19	48
	5	221	53	51	55	50	48	39	32	22	53
Ø160 mm	1	72	48	48	40	32	21	16	16	18	36
	3	217	53	53	50	43	37	29	25	19	45
	5	362	58	57	54	49	46	43	34	23	52
Ø200 mm	1	113	53	47	39	34	29	30	24	18	38
	3	339	60	60	53	49	45	41	32	21	52
	5	565	63	65	64	62	57	54	45	36	63
Ø250 mm	1	177	54	48	40	32	24	21	19	18	36
	3	530	60	60	56	50	45	40	32	21	53
	5	884	64	64	66	62	60	57	50	36	65

ACOUSTIC PERFORMANCES WITH A 150 Pa PRESSURE LOSS

	Air velocity m/s	Airflow m ³ /h	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	Global Lw (dBA)
			Air-regenerated, sound power level Lw								
Ø125 mm	1	44	60	48	43	42	35	32	34	25	43
	3	133	59	57	67	56	47	39	35	29	58
	5	221	60	59	61	55	53	46	43	36	58
Ø160 mm	1	72	52	53	45	40	34	33	34	29	44
	3	217	57	58	61	53	45	40	35	28	54
	5	362	62	63	62	55	50	48	41	34	58
Ø200 mm	1	113	57	53	50	48	47	49	44	38	54
	3	339	64	66	59	55	51	52	51	42	59
	5	565	66	70	66	62	58	57	54	47	65
Ø250 mm	1	177	59	55	49	44	41	4	57	51	61
	3	530	65	66	60	52	48	57	60	57	65
	5	884	69	69	68	62	60	57	54	58	66

Acoustic performances with a 100 Pa pressure loss, on request

VARIABLE AIR VOLUME CIRCULAR DAMPER

e-VAV self-sufficient & connected

TECHNICAL SPECIFICATIONS SENSORS AND COMMUNICATION

Relative Humidity and Temperature sensor	RH operating range	0 to 80 % (non-condensing)
	Accuracy	± 3 %
	Operating temperature T°	0 to 45 °C
	Accuracy	± 1°C
	Type	Low power MEMS sensor
CO ₂ sensor	CO ₂ operating range	0 to 2000 ppm
	Accuracy	± 50 ppm
	Type	NDIR low power
Communication RF	Protocol	LoRaWan
	Frequency band	868 GHz

DESCRIPTION




Body

Iris damper

The box includes :

- 1 wiring box for wired 0-10V signal or dry contact (controlled by an external sensor)
- 1 RJ45 plug for master / slave connection
- 1 RJ45 plug for the service tool (on site modification)
- 1 Led and and action button

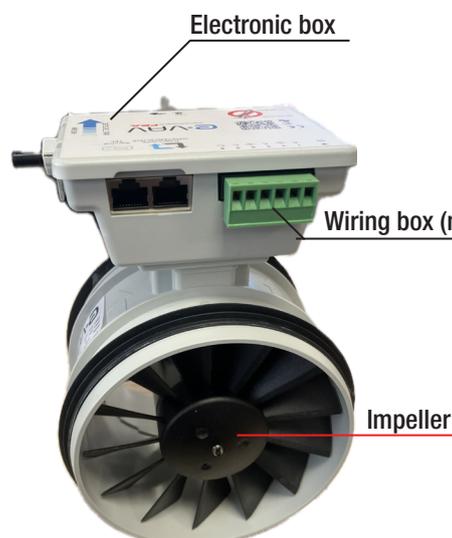

Electronic box

Impeller

Wiring box (not included)




VARIABLE AIR VOLUME CIRCULAR DAMPER

e-VAV self-sufficient & connected

OPERATING PRINCIPLE



Supply or exhaust air controlled by a room CO₂ sensor with an e-VAV-S (S=Standard)

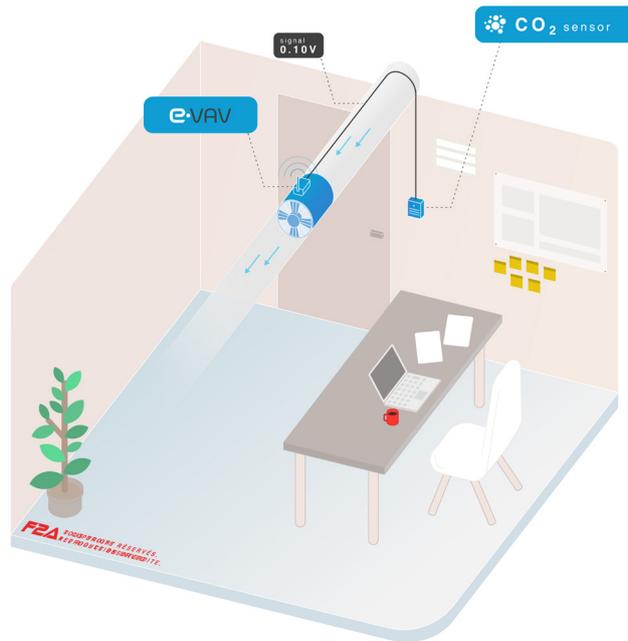

The damper is controlled by a 0..10V signal from a room CO₂ sensor which itself measures in real time the CO₂ concentration and sends a 0..10 V signal to the damper to adapt the airflow rate.

The damper is factory set. The remote sensor can be supplied with 24 V by an external source.

The CO₂ sensor can be replaced by a presence detector.

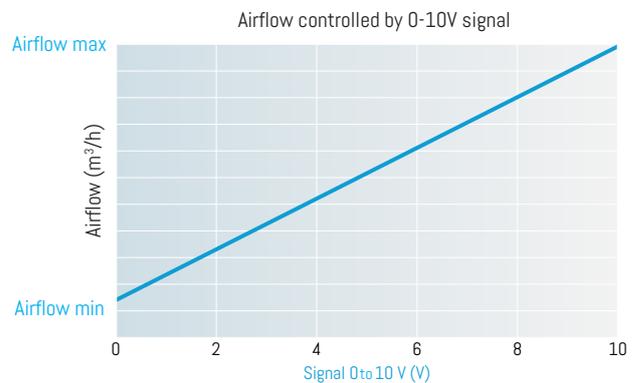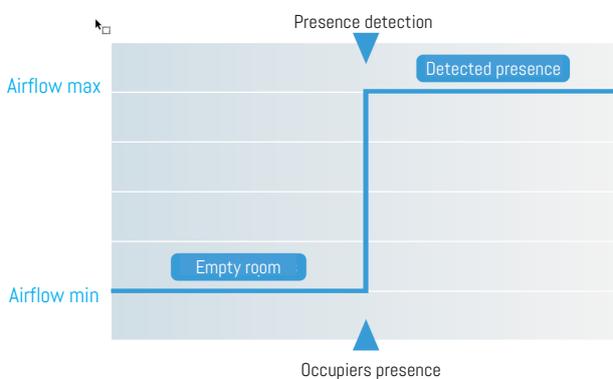


VARIABLE AIR VOLUME CIRCULAR DAMPER

e-VAV self-sufficient & connected


Wiring diagram

Dedicated to a wired signal provided by a CO₂ sensor or a presence sensor.
The wiring box is not included and can be ordered separately.
The external sensor have to be powered in 24V.

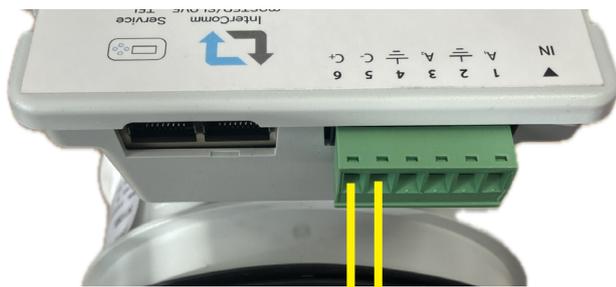

Dry contact signal
external control
presence detector

C +
C -

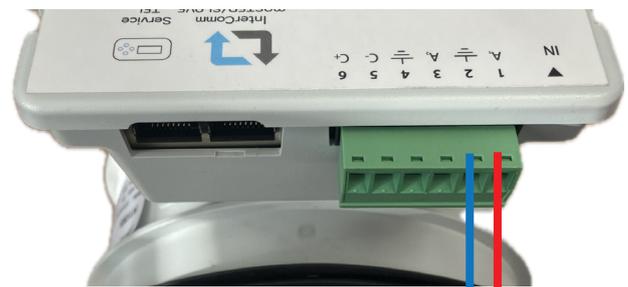

0..10V analog signal
external control
Analog 1 in standard



0V
10V

Bill of material:

- 1 e-VAV
- 1 presence sensor
- One 230V/24V transformer


Bill of material:

- 1 e-VAV
- 1 CO₂ sensor
- One 230V/24V transformer

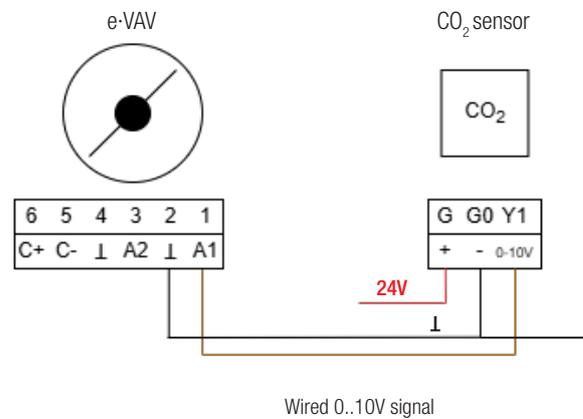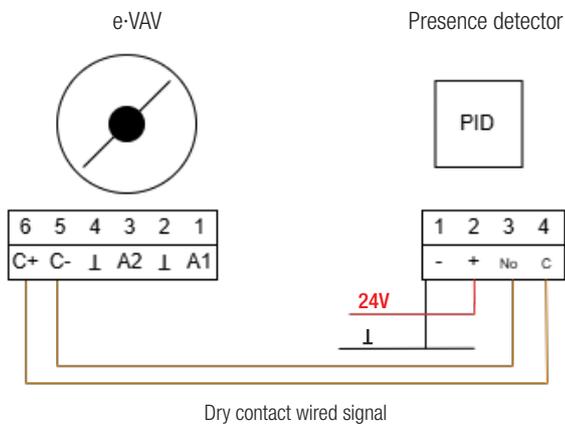


VARIABLE AIR VOLUME CIRCULAR DAMPER

e·VAV self-sufficient & connected

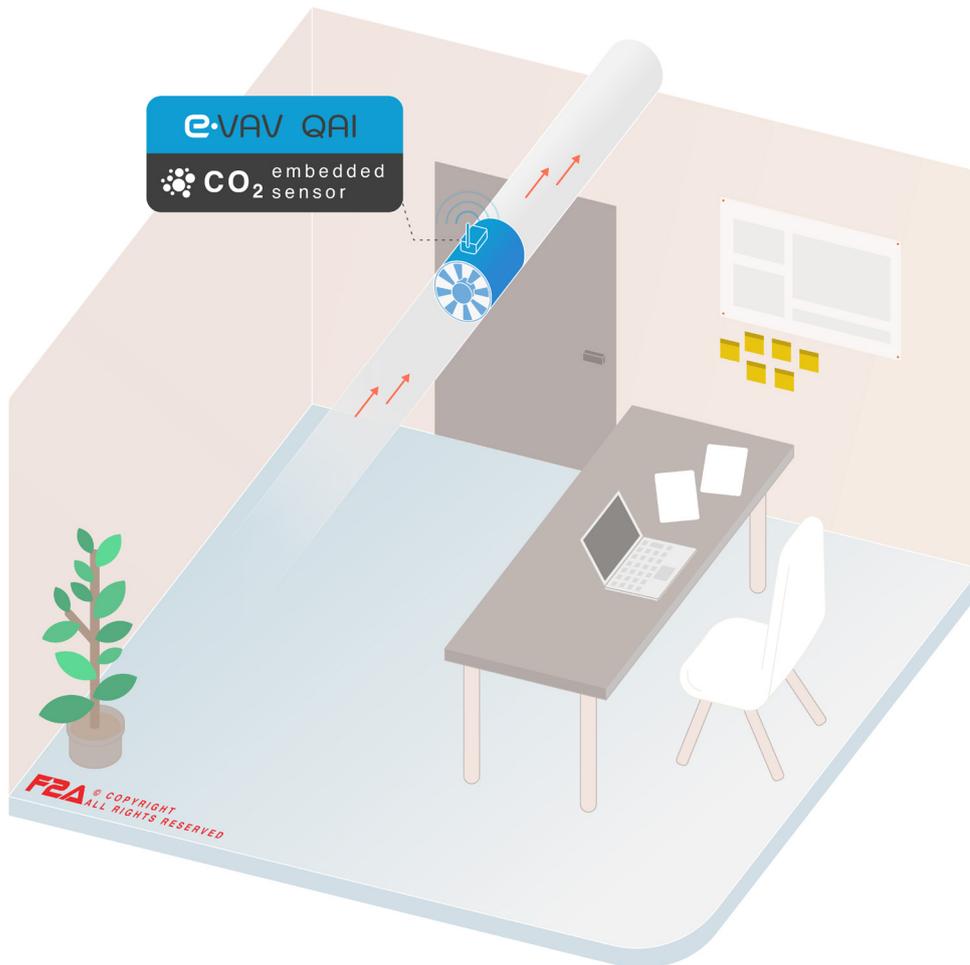

The e-VAV QAI damper in the exhaust is controlled by the CO₂ measured by its integrated sensor. The damper is factory set with minimum and maximum airflow and CO₂ values.

No connection needed

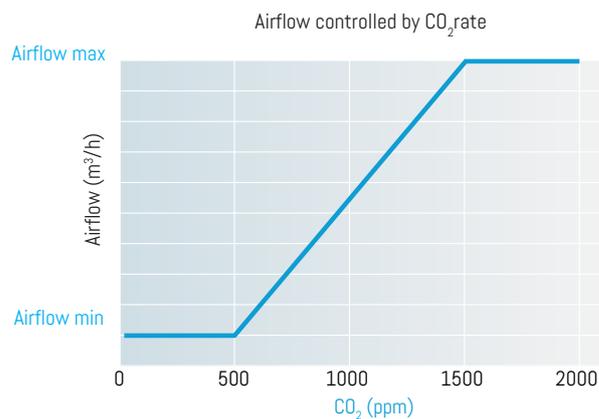


VARIABLE AIR VOLUME CIRCULAR DAMPER

e-VAV self-sufficient & connected

AIR MANAGEMENT

Exhaust air controlled by an e-VAV QAI with integrated CO₂ sensor at the exhaust and one slave e-VAV at the supply

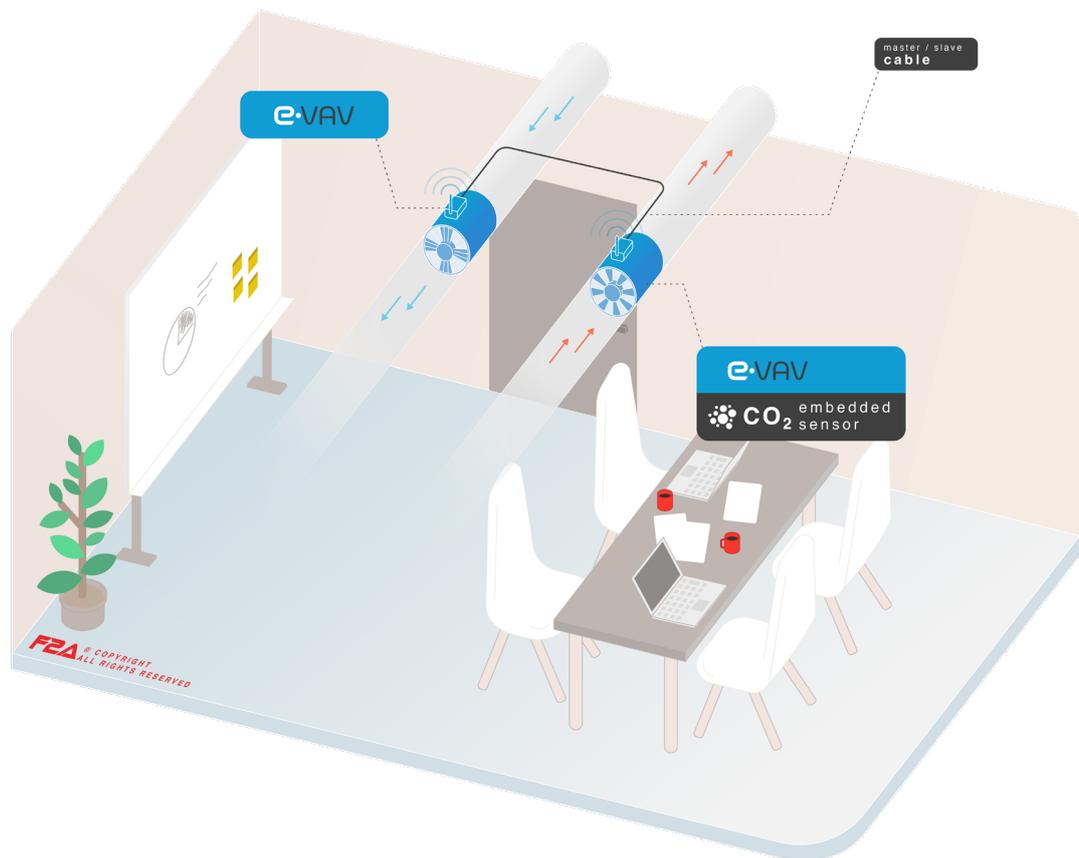


The e-VAV QAI damper in the exhaust is controlled by the CO₂ measured from its integrated sensor. It is factory set with minimum and maximum airflow and CO₂ values.

The e-VAV damper at the supply is on slave mode controlled by the e-VAV QAI master. The signal is transmitted via a specific wire provided.

Pack e-VAV QAI equipment list:

- 1 e-VAV QAI at the exhaust
- 1 e-VAV at the supply
- 1 master/slave wire

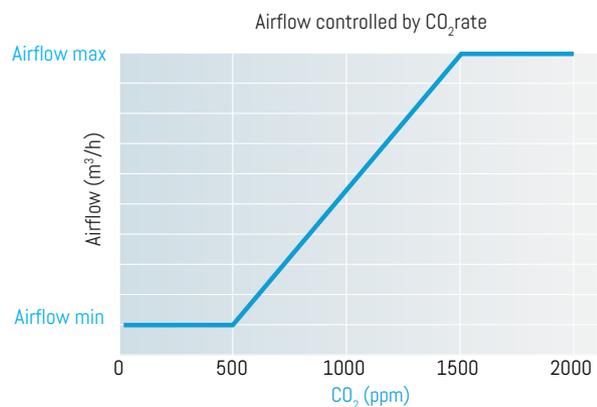

VARIABLE AIR VOLUME CIRCULAR DAMPER

e-VAV self-sufficient & connected

Wiring diagram

1/ Identify the RJ45 ports dedicated to master/slave communication:

Master/Slave interconnection



2/ Check that the cable is correctly inserted and secured in the RJ45 port without causing damage. Avoid tension or strain



3/ Connect the RJ45 cables to the master and the slave units. The two e-VAV units are now connected in master/slave mode. A 10 m cable is supplied as standard.




INSTALLATION

Always install the e-VAV with the airflow directed towards the turbine.


The damper fits between two duct sections using EPDM gaskets. No screws are required.

Always support the rigid or flexible ducts on both sides of the e-VAV.


The damper must not bear the weight of the ductwork (risk of damage to the damper).

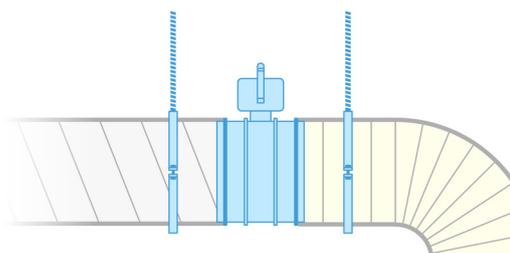

Installation between 2 steel ducts

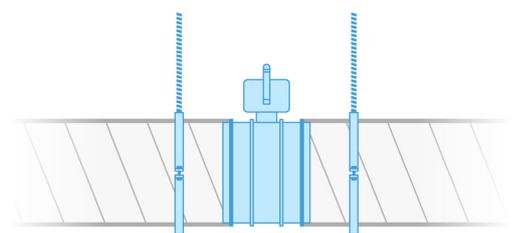

Installation between 2 steel ducts

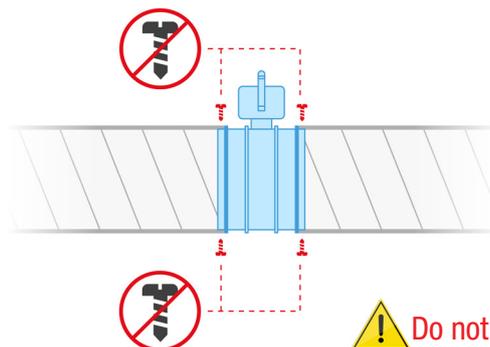

! Do not screw the unit into the duct.

VARIABLE AIR VOLUME CIRCULAR DAMPER

e-VAV self-sufficient & connected

COMMISSIONING

The **e-VAV** needs an air flow to be activated. Start the AHU and wait for the **e-VAV** to start the regulation. The start-up time is a maximum of 60 minutes and an average of 40 minutes.

After 60 min, the **e-VAV** starts to reach the target according to the signal it receives: dry contact, 0-10V or CO₂.
LoRa commissioning: all products are labelled with their LoRa identifier

N° Article :	EVAVD125-S	Designation :	EVAV D125 HRT		
Dev EUI :	XX-XX-XX-XX-XX-XX-XX-XX				
Label :	eVAV T5	Building :	n°1	Place :	R5
Regulation :	0-10 V				
Airflow min :	40	Value min :	0 V		
Airflow max :	220	Value max :	10 V		

COMMISSIONING WITH REMOTE CONTROL

For more information, ask for the dedicated technical documentation of the e-VAV remote control. You will find all the information for modifying the airflow and the other parameters.




VARIABLE AIR VOLUME CIRCULAR DAMPER

e·VAV self-sufficient & connected


«Main» Menu

Turn on the remote control, plug the RJ45 and press "Connect e-VAV"

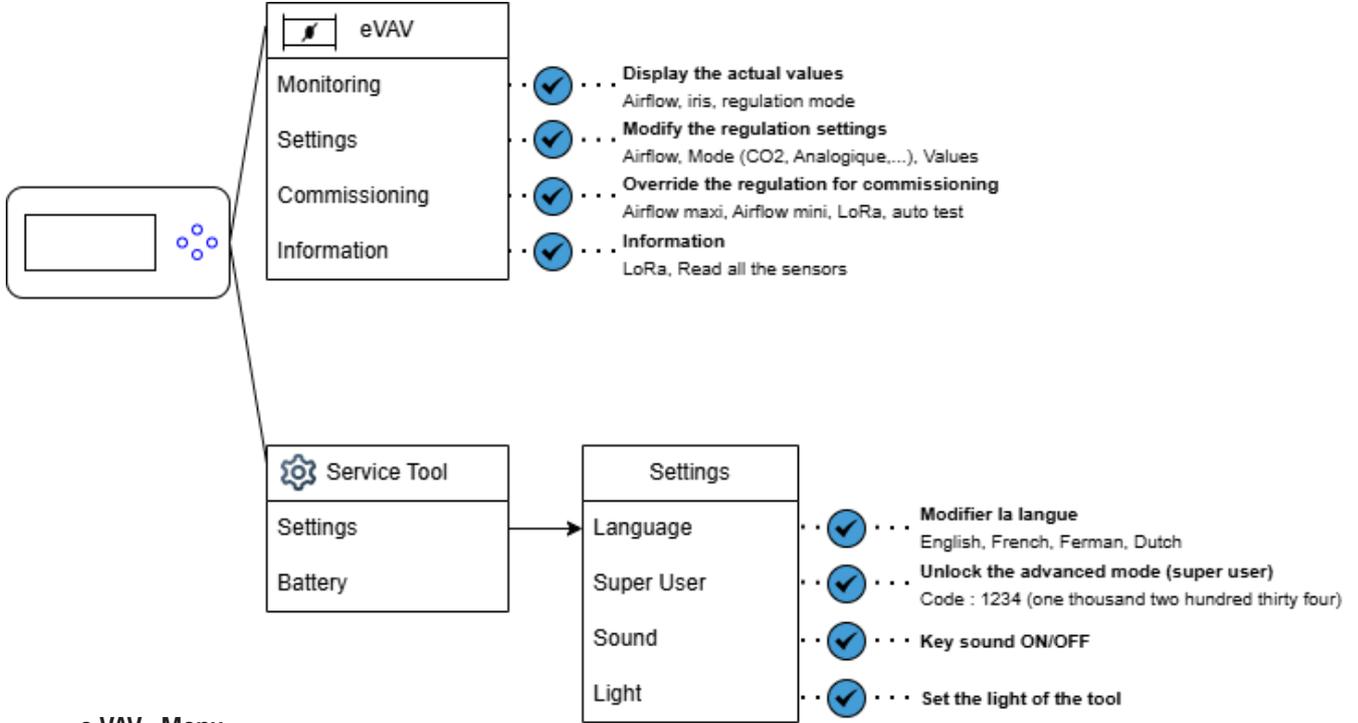

«e-VAV» Menu

Select the menu corresponding to your requirements

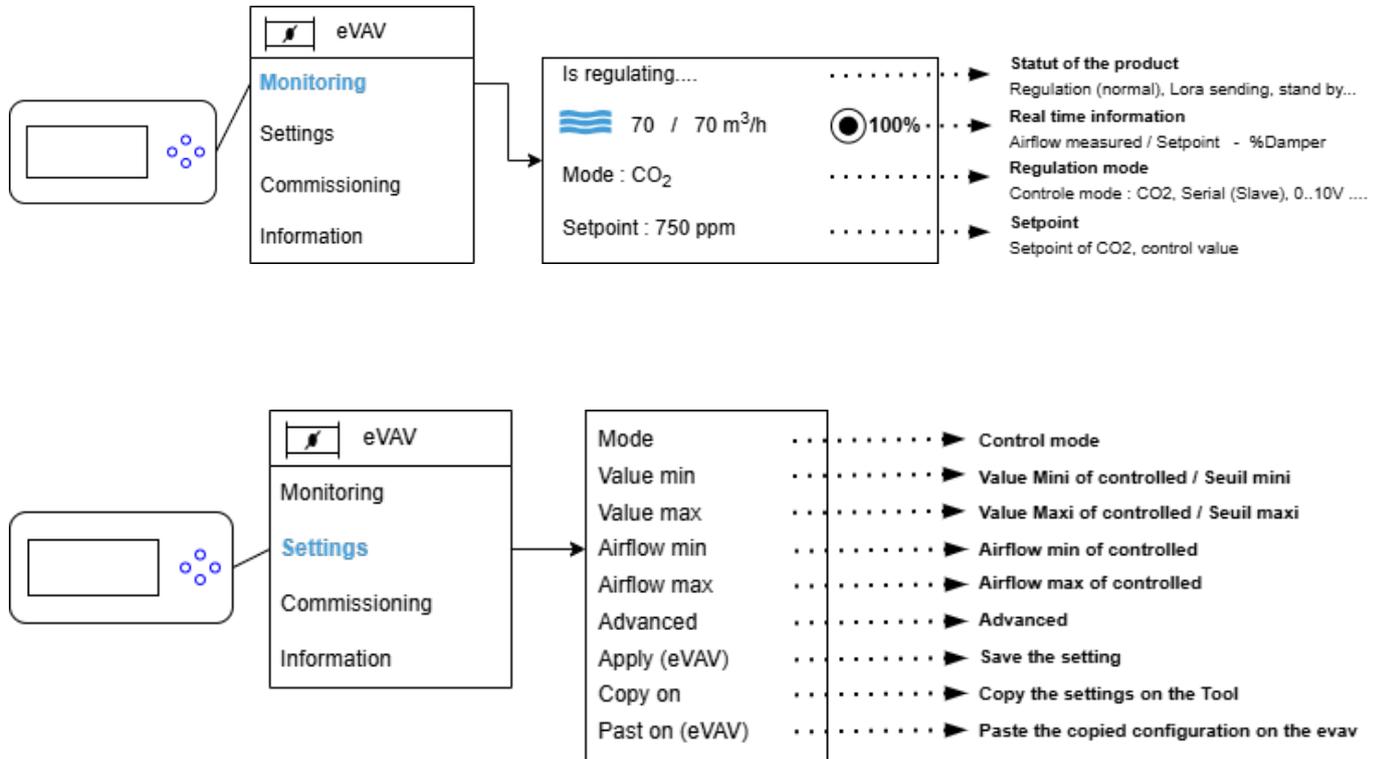

FT_eVAV_02/2026_EN. Information and data can not be considered as contractual. Design and data changes may occur without notice during F2A's continuous product development.

VARIABLE AIR VOLUME CIRCULAR DAMPER


e-VAV self-sufficient & connected

MONITOR YOUR INDOOR AIR QUALITY AND ACT ON YOUR SYSTEM WITH SI-MO

The **e-VAV** communicates with LoRaWAN protocol. It allows you to manage all parameters remotely. With the integrated sensors, you can monitor the indoor air quality (CO₂), the comfort and all the airflows in your buildings. You can check the damper efficiency, optimize the consumption and the costs.

You can act to change the configuration of the damper remotely controlled through the LoRa network. It allows you to adjust your ventilation system to optimize it during all the building life cycle.

The SI-MO solution enables also the use of LoRaWAN CO₂ sensor or occupancy sensor to control directly the eVAV damper. So, the whole installation is wireless and without cabling.

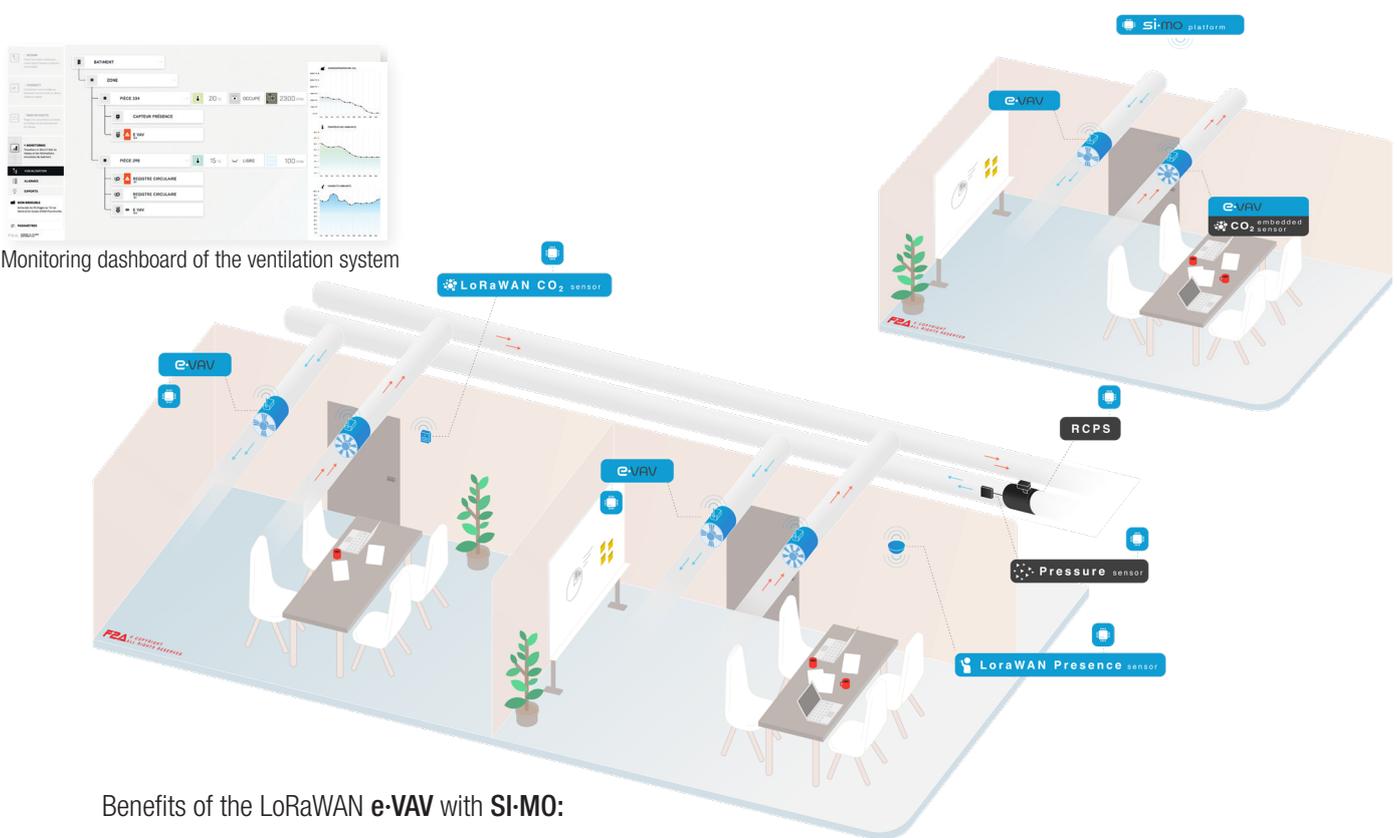

Benefits of the LoRaWAN **e-VAV** with **SI-MO**:

- Easy solution to add an Indoor Air Quality system
- Monitor the Indoor Air Quality during the whole lifetime of the building
- Act and control your variable air volume damper remotely
- Detect and solve issues without human intervention

Product list:

- **e-VAV**: self-powered variable air volume damper
- Gateways: box to receive and send LoRa information
- LoRaWAN sensors, CO₂ or occupancy
- SI-MO controller : vav and **e-VAV** controller
- Dashboard: a ready-to-roll solution to monitor all the dampers, embedded into the **SI-MO** controller



The **e-VAV** can also interact with other IoT products in the building, controlled by another platform using the LoRaWAN communication protocol.

CONTACT :

CONTACT :

A PROJECT, A QUESTION ?

F2A sites are based in France, our projects all over the world.

Our switchboard is open from Monday to Friday from 8 am to 5:30 pm.

GENERAL AND COMMERCIAL MANAGEMENT

1214 rue des Chartinières

01120 Dagneux - France

TEL: +33 (0)4 78 06 54 72

F2A ACOUSTIC FACTORY

Allée des Princes

01120 Dagneux - France

F2A TEXTILE FACTORY

70 impasse des Barmettes

Parc d'activité des 2B

01360 Béliigneux - France

F2A AIR MANAGEMENT FACTORY

Zone Industrielle n°1

La Fourcadière

61300 Saint Ouen sur Iton - France

